

**OASE GmbH**  
 Tecklenburger Straße 161  
 D - 48477 Hörstel  
 Phone: +49(0)54 54 – 800  
 Fax: +49(0)54 54 – 80 322  
 info@oase-livingwater.com  
 www.oase-livingwater.com

**Aquarius Universal 5000**





**56617**

Fresh water	Pool water	Sea water	220-240 V	400 V	110-120 V	50 Hz	60 Hz	12 V AC	24 V DC	DMX	DMX/RDM	Plug & Spray



### Product characteristics at a glance

- Extremely quiet operation
- Easy adjustment of the flow rate
- Integrated thermal protection-from 600 onwards
- Can be used underwater or dry installations
- Energy-efficient thanks to low energy consumption
- Frost-resistant to -20° C
- High-quality workmanship with stainless steel
- Priming even at low water levels
- Removable pedestal for installation where space is at a premium

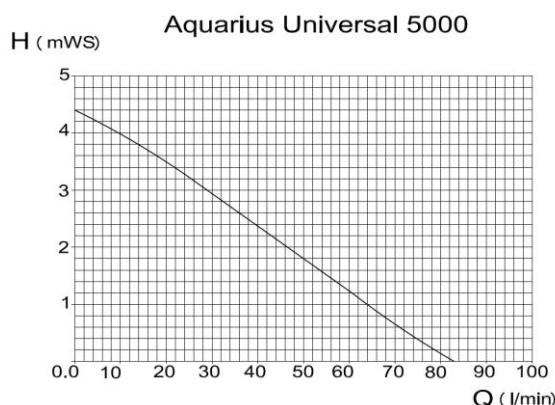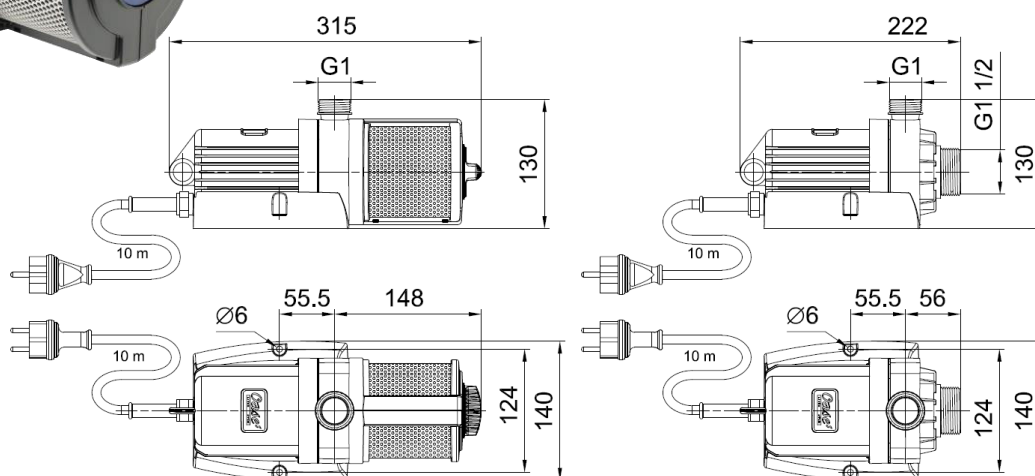

		Aquarius Universal 5000
Dimensions (LxWxH)	[mm]	315x140x130
Rated voltage	[V/Hz]	220-240/50
Power consumption	[Watt]	85
Flow rate max.	[L/min]	83
Flow rate max.	[L/h]	5000
Head height max.	[m]	4.50
Hose connection	[inch]	1,1 1/4,1 1/2
Pressure side connection	[inch]	1
Suction side connection	[inch]	1 1/2
Filter intake surface	[cm <sup>2</sup> ]	200
Net weight	[kg]	3.42
Cable length	[m]	10
Electronic adjustment		Yes
Order no.		56617

The information contained in this data sheet is the sole property of OASE GmbH. Any reproduction in part or as a whole without the written permission of OASE GmbH is prohibited.

30.08.2017\_AP

Version 1.2

sheet 1/1